




Vaughan E Series Chopper Pump PERFORMANCE CURVE

Models:
HE3L6
PE3L6

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	7.5	1765	8.00" (203 mm)
B	7.5*	1765	7.50" (191 mm)
C	5	1750	7.00" (178 mm)

Back-Pull-Out Casing
3-Blade Impeller
3" Discharge
6" Suction

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B. * EXCEEDS 5 HP BEYOND 360 GPM

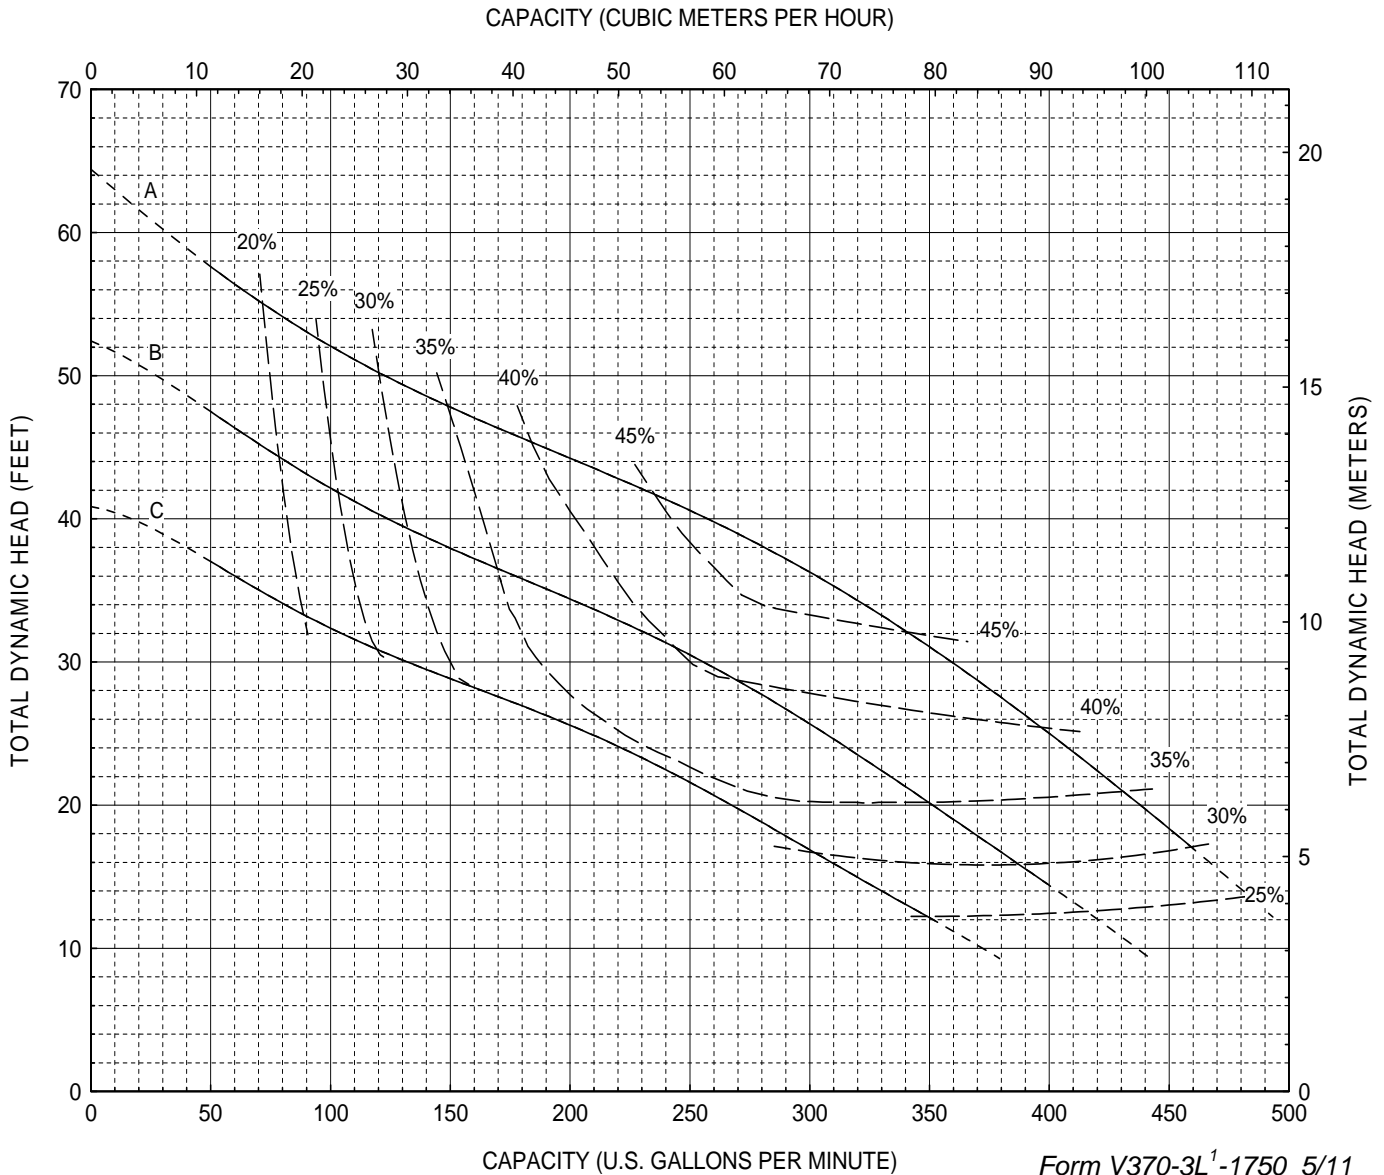




Vaughan E Series Chopper Pump PERFORMANCE CURVE

Models:
SE3L
S3L

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	7.5	1730	8.00" (203 mm)
B	7.5*	1730	7.50" (191 mm)
C	5	1725	7.00" (178 mm)

Back-Pull-Out Casing
3-Blade Impeller
3" Discharge
6" Suction

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B.
* EXCEEDS 5 HP BEYOND 400 GPM

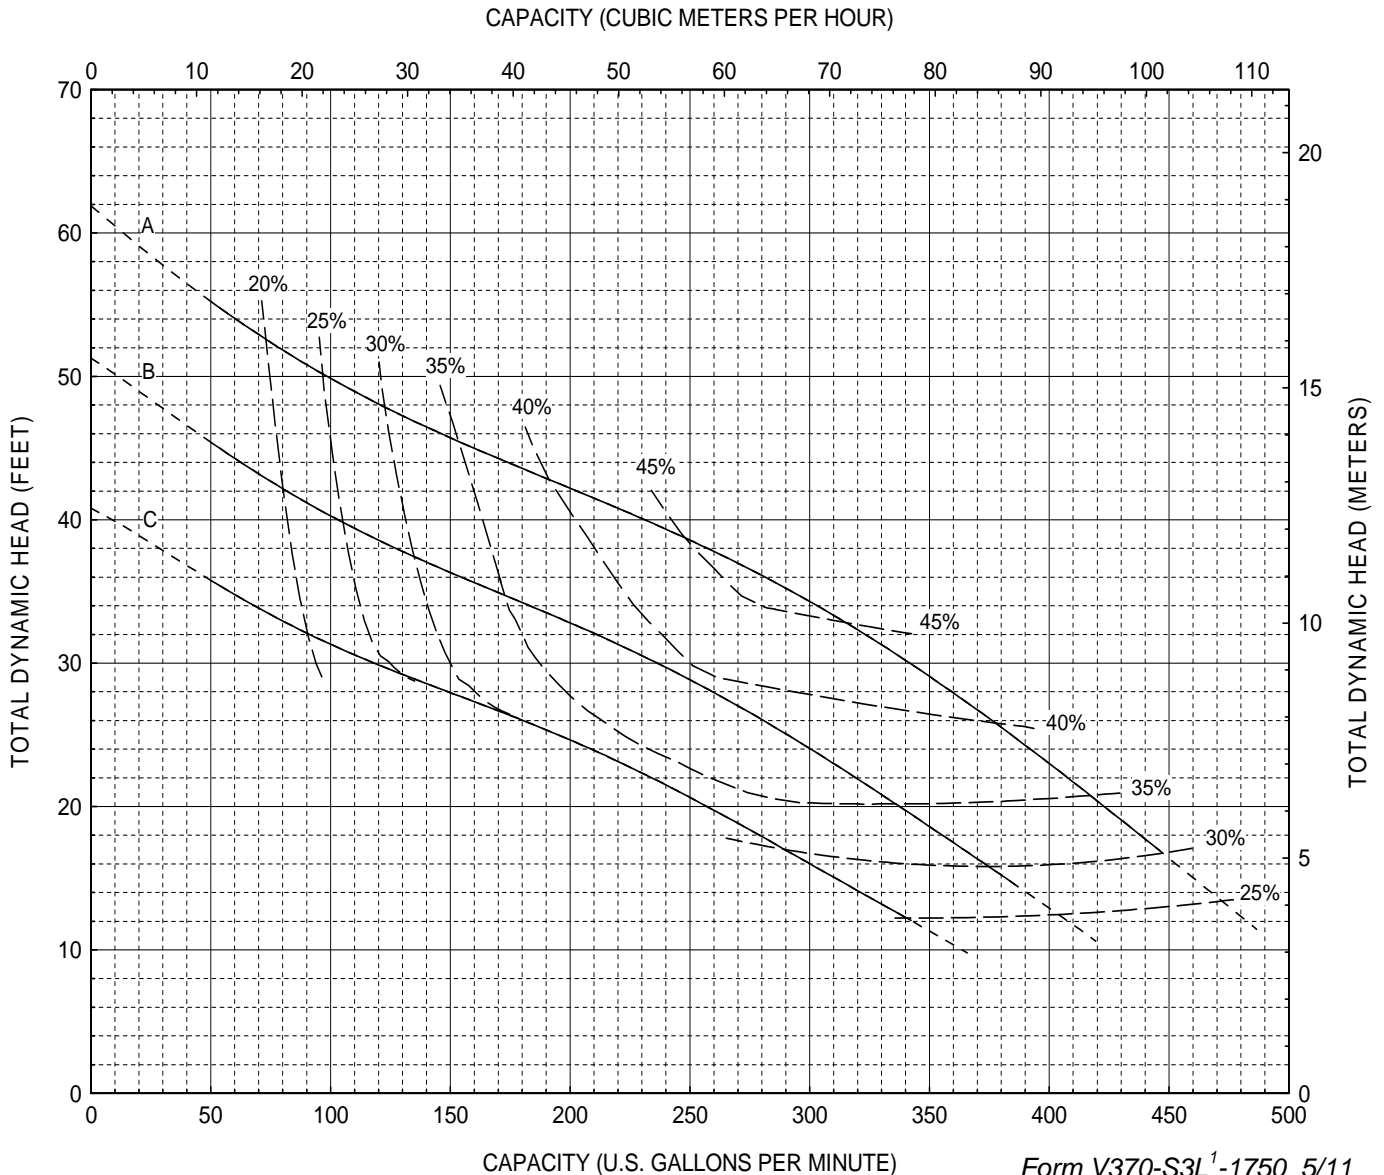

CAPACITY (U.S. GALLONS PER MINUTE)

Form V370-S3L¹-1750 5/11