




Vaughan E Series Chopper Pump PERFORMANCE CURVE

**Models:
HE3P6
PE3P6**

**Back-Pull-Out Casing
3-Blade Impeller
3" Discharge
6" Suction**

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20*	1760	10.30" (262 mm)
B	15	1765	10.00" (254 mm)
C	15	1765	9.70" (246 mm)
D	15	1765	9.50" (241 mm)
E	15	1765	9.20" (234 mm)
F	10	1755	9.00" (229 mm)
G	10	1755	8.50" (216 mm)
H	7.5	1765	8.20" (208 mm)
I	7.5	1765	8.00" (203 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B. CURVES ARE BASED ON PREMIUM EFFICIENT TEFC MOTOR SPEEDS. *EXCEEDS 15 HP AFTER 460 GPM.

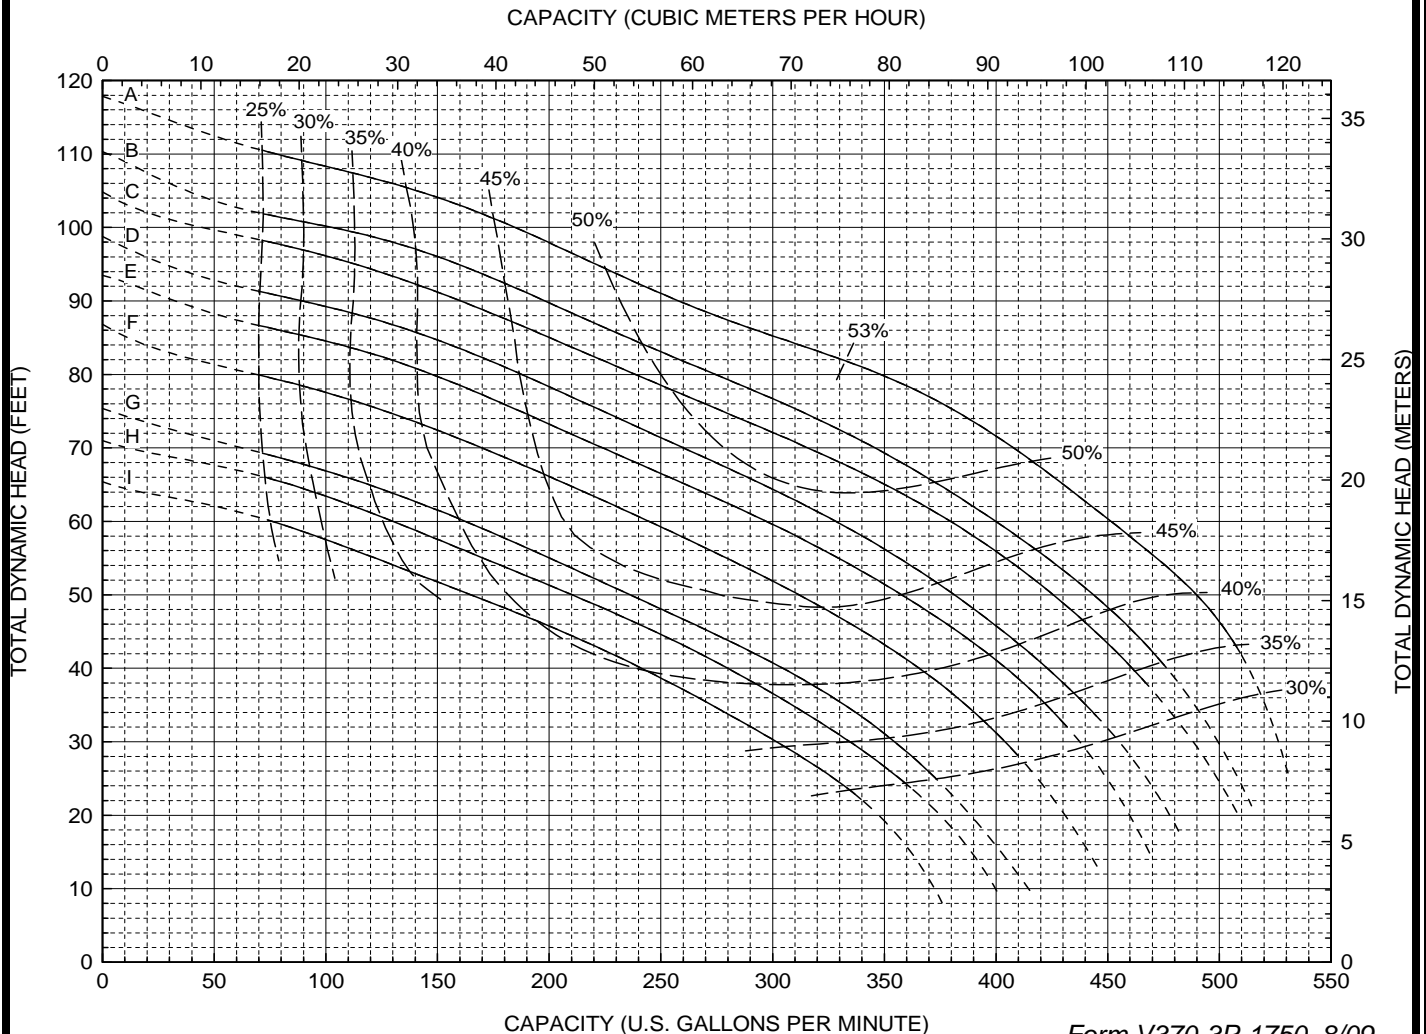



Vaughan®

Vaughan E Series Chopper Pump PERFORMANCE CURVE


Models:
SE3P
S3P

Back-Pull-Out Casing
3-Blade Impeller
3" Discharge
6" Suction

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20*	1740	10.30" (262 mm)
B	15	1745	10.00" (254 mm)
C	15	1745	9.70" (246 mm)
D	15	1745	9.50" (241 mm)
E	15	1745	9.20" (234 mm)
F	10	1755	9.00" (229 mm)
G	10	1755	8.50" (216 mm)
H	7.5	1730	8.20" (208 mm)
I	7.5	1730	8.00" (203 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B. CURVES ARE BASED ON SUBMERSIBLE MOTOR SPEEDS. *EXCEEDS 15 HP AFTER 460 GPM.

CAPACITY (CUBIC METERS PER HOUR)

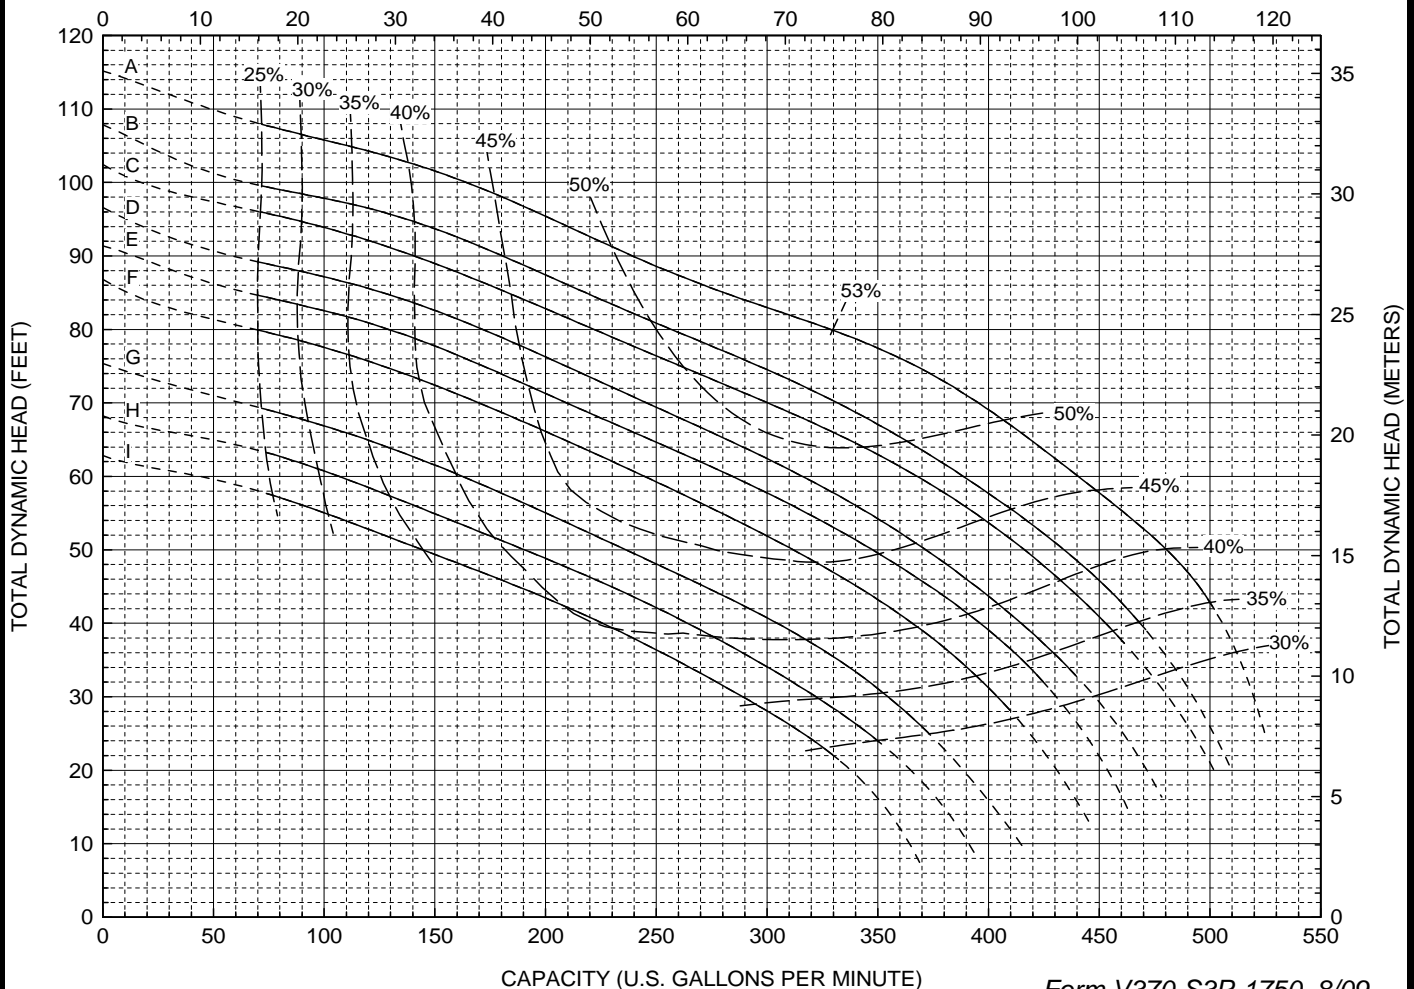

CAPACITY (U.S. GALLONS PER MINUTE)