




Vaughan E Series Chopper Pump PERFORMANCE CURVE

**Models:
HE4L6
PE4L6**

**Back-Pull-Out Casing
4-Blade Impeller
4" Discharge
6" Suction**

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20	1760	8.90" (226 mm)
B	20	1760	8.50" (216 mm)
C	15	1765	8.30" (211 mm)
D	15	1765	8.00" (203 mm)
E	10	1765	7.50" (191 mm)
F	7.5	1765	7.00" (178 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. CURVES ARE BASED ON PREM. EFF. TEFC MOTOR SPEEDS. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

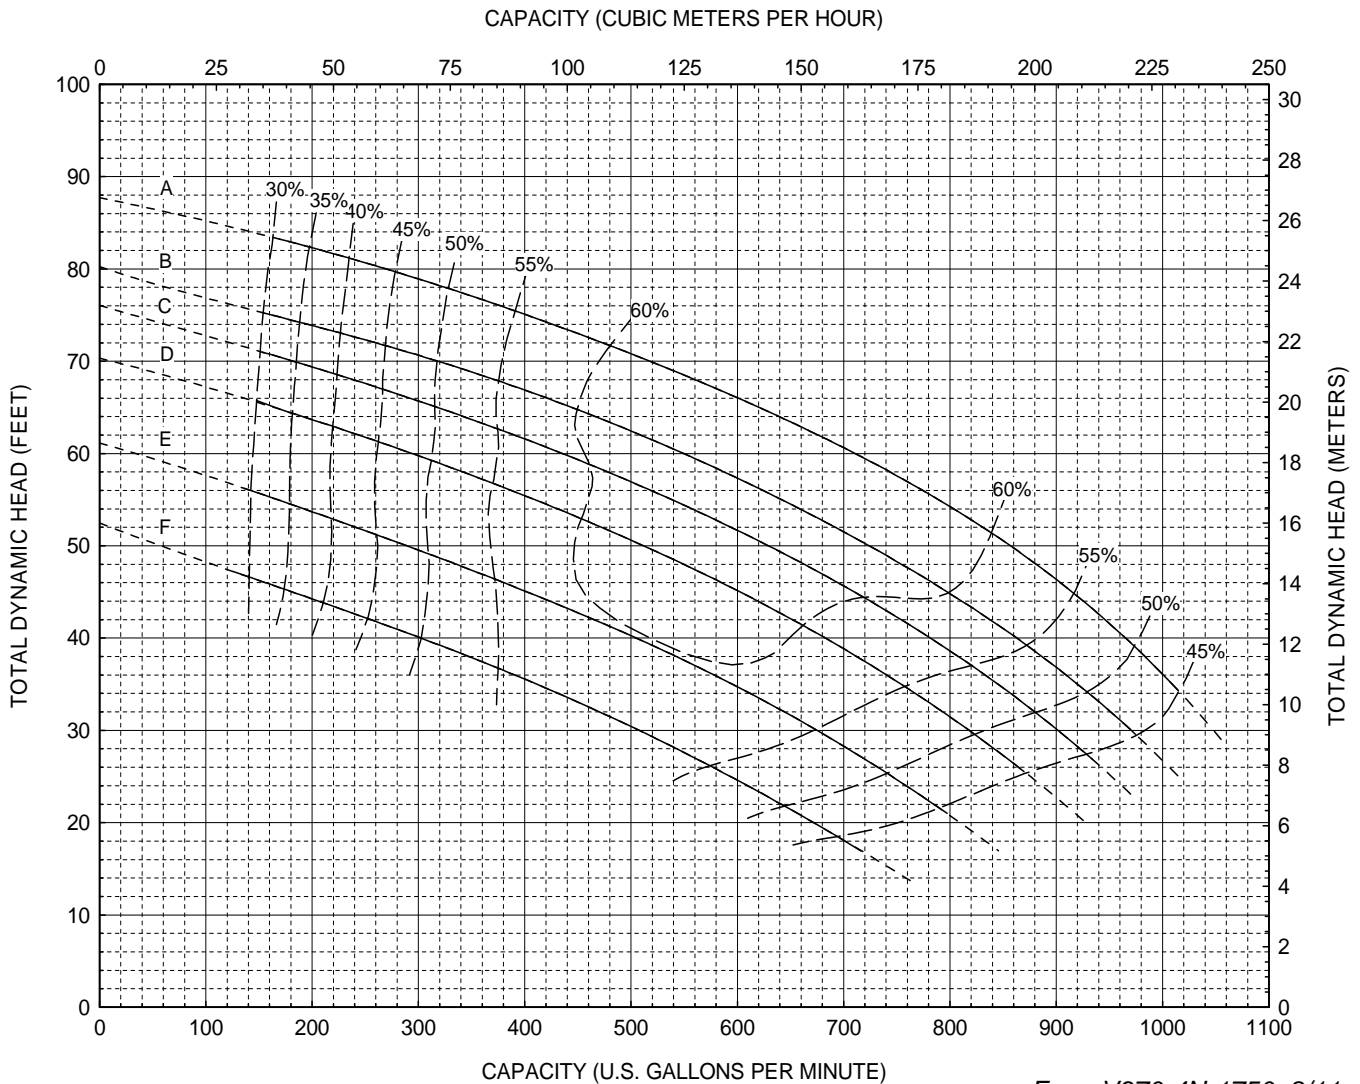



Vaughan E Series Chopper Pump PERFORMANCE CURVE

**Models:
SE4L**

Back-Pull-Out Casing
4-Blade Impeller
4" Discharge
6" Suction

CURVE	POWER (HP)	SPEED (RPM)	IMPELLER DIAMETER
A	20	1740	8.90" (226 mm)
B	20	1740	8.50" (216 mm)
C	15	1745	8.30" (211 mm)
D	15	1745	8.00" (203 mm)
E	10	1755	7.50" (191 mm)
F	7.5	1730	7.00" (178 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. CURVES ARE BASED ON SUBMERSIBLE MOTOR SPEEDS. EFFICIENCIES SHOWN ARE NOMINAL BOWL. GUARANTEED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

CAPACITY (CUBIC METERS PER HOUR)

