



# Vaughan

## Vaughan E Series Vertical Chopper Pump PERFORMANCE CURVE

### Models:

**C6U** (max 3' long)

**V6U**


**V6UR**

**4 Blade Impeller**  
**6" Discharge**  
**Tangential Casing**  
**Variable Speed Curve**

CURVE	POWER (HP/KW)	SPEED (RPM)	IMPELLER DIAMETER
A	100/75	1785	11.80" (300 mm)
B	75/55	1720	11.80" (300 mm)
C	60/45	1600	11.80" (300 mm)
D	50/37	1470	11.80" (300 mm)
E	40/30	1340	11.80" (300 mm)
F	25/18.5	1175	11.80" (300 mm)
G	20/15	1070	11.80" (300 mm)
H	15/11	970	11.80" (300 mm)
I	10/7.5	870	11.80" (300 mm)
J	7.5/5.5	690	11.80" (300 mm)
K	5 / 4	500	11.80" (300 mm)

DO NOT OPERATE PUMP IN DOTTED PORTION OF CURVES. CURVES SUBJECT TO CHANGE WITHOUT NOTICE. EFFICIENCIES SHOWN ARE NOMINAL. GUARANTIED MINIMUM EFFICIENCIES PER H.I. LEVEL B.

CAPACITY (CUBIC METERS PER HOUR)

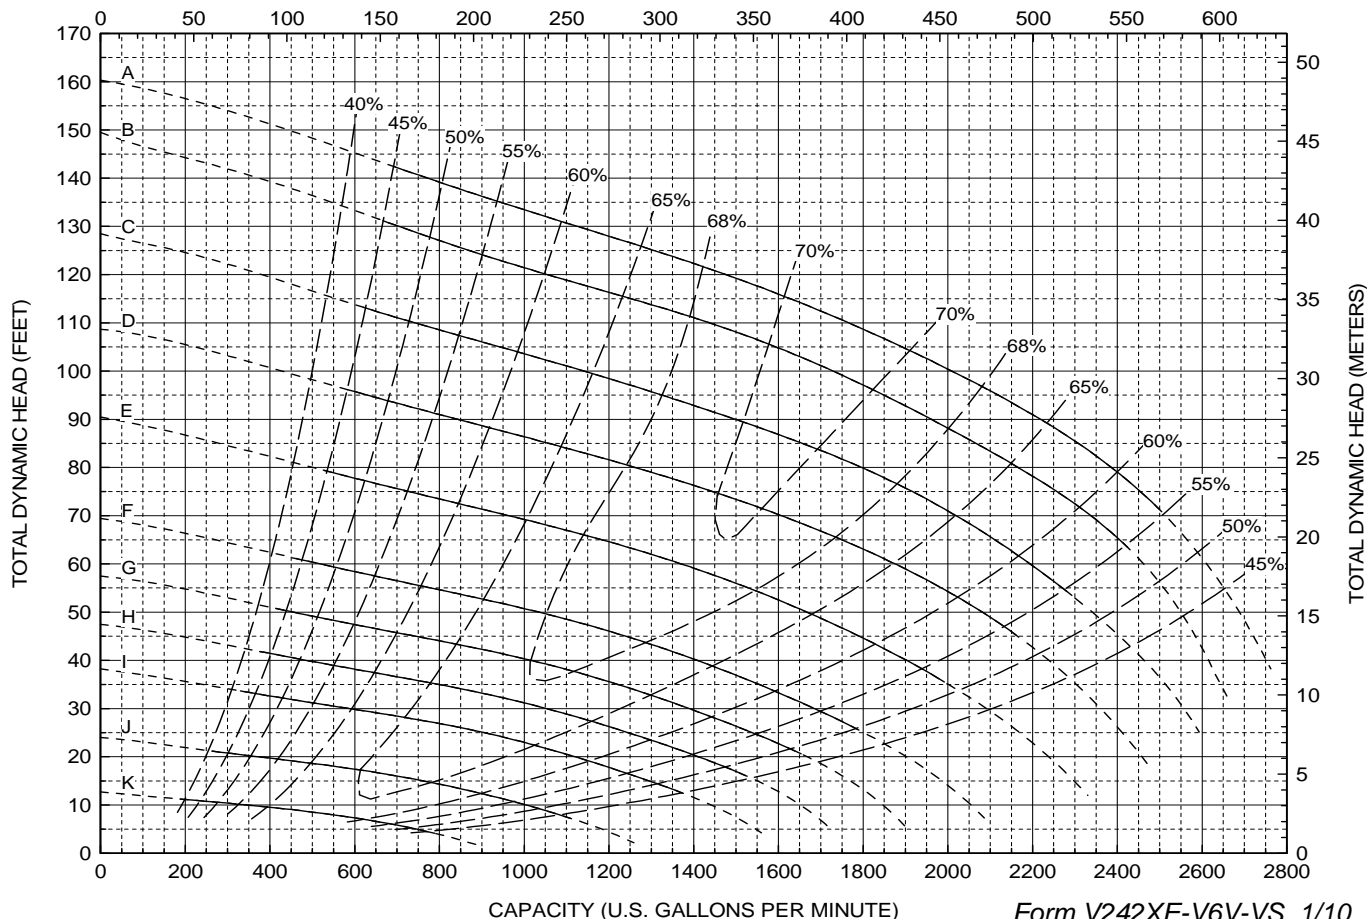

CAPACITY (U.S. GALLONS PER MINUTE)

Form V242XE-V6V-VS 1/10